


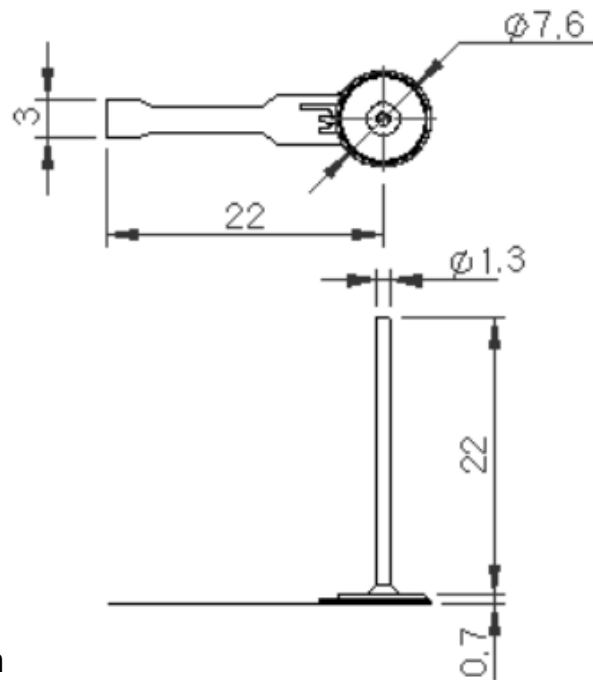

Technical Description

Item	Value*	Condition
Speed (no load)	>10 mm/s	Driving voltage: 20 V
Max-thrust	>50 g.f**	Frequency: 40 ~ 55 kHz
Holding-Force	120 ~ 160 g.f**	Temperature: ~25°C
Stroke	<15 mm	
Rod(shaft) length	<30 mm	
Driving frequency	40~55 kHz	Piezo-Motor-Meter***
Driving voltage	20 ~ 35 V	
Power Consumption	<500 mW	
Operating Temperature	-20 ~ 60 °C	
Storage Temperature	-30 ~ 80 °C	
Humidity(non condensing)	15 ~ 90 %	

* The value varies depending on slider type, rod holder (e.g. rubber cap) type, length of rod and especially on the driving voltage.

** 1 gram force = 9.8 mili Newton

*** Piezo Motor Meter tests the frequency and speed of piezo motors. Available on demand.

suitable standard slider: PZM-L-813

